

Auger Jogger Installation Instructions

Installation videos also available at
www.augerjogger.com

Tools Required For Installation: (2) 9/16" Wrenches

(2) 1 - 1/8" Wrenches

(1) 7/16" (1) 10 mm Wrench

(1) 14 mm Wrench

3mm Allen Wrench

Wire Stripper

Wire Crimper


Flathead Screwdriver



Step 1 Drive Bracket Assembly

-Install drive motor to drive brackets, securing with 14mm wrench

*Note that both drive brackets are the same and can be used for both right or left application.

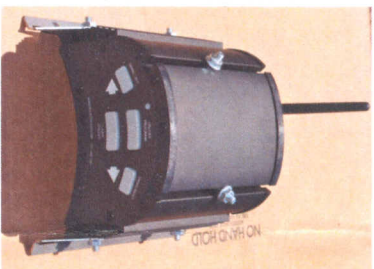


Step 2 Installing control box bracket

Install control box bracket using 1/4 x 3/4 bolt and flange nut

- a. Attach antenna
- b. Assemble Optional LED light feature at this time by securing light to control box using the (4) 1/4 " x 3/4" bolts and nuts



Step 3 Remove existing tires on discharge side of hopper.

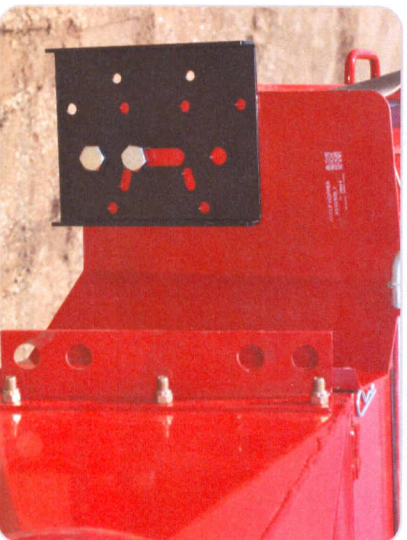

Step 4 Bolt both mounting brackets onto auger using existing holes



Step 5 Install drive motor assembly to the mounting plate by using 3/8" x 9" bolt and locknuts

-achieve desired tire height by sliding bracket up or down selecting appropriate hole to secure



Step 6 Install drive tire and secure with 5/16" Lynch pin

Auger Jogger Installation Instructions

Installation videos also available at
www.augerjogger.com

Tools Required For Installation: (2) 9/16" Wrenches

(2) 1 - 1/8" Wrenches

(1) 7/16" (1) 10 mm Wrench




(1) 14 mm Wrench

3mm Allen Wrench

Wire Stripper

Wire Crimper

Flathead Screwdriver

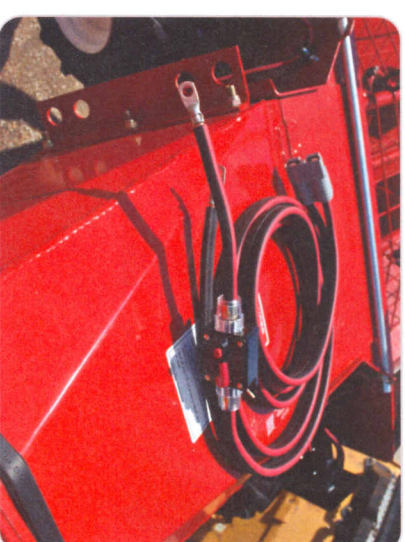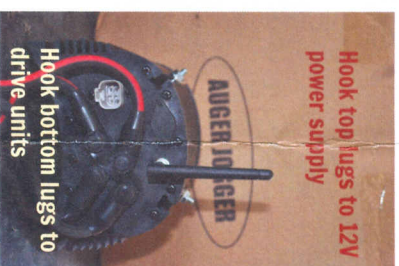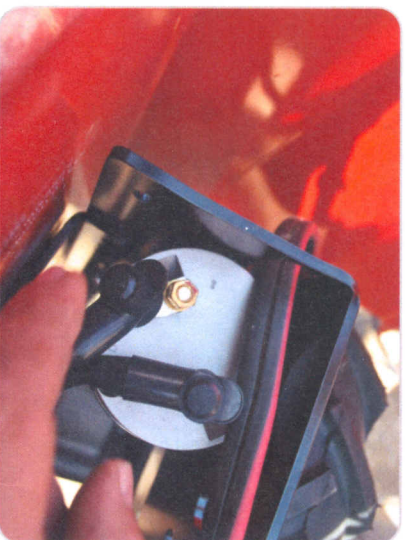

Step 7 Install drive motor Y-harness between drive motor and control box. Attach longer leg of Y-harness to the bottom studs on control box
*(*Mover direction can be reversed by reversing wires on the Y harness and control box)*

Step 8 Install control box harness to top pegs of control box: red to positive and black to negative. Fasten harness securely to the auger all the way to the draw bar using tarp straps and zip ties.

Step 9 Cut tractor harness to proper length to reach tractor battery.
Step 10 Install circuit breaker as close to the positive battery post as possible. Be sure you have 12 volt operating system on tractor.

Parts List:

- 2- Drive Plates
- Y- Drive Motor Harness
- Control Box Harness
- Tractor Harness
- 2- Drive Motors
- Control Box Hardware
- Control Box
- 4 Remotes
- 4 Tarp Straps
- 2 Control Box Clamps
- 2 Mounting Plates
- 2 Tires
- Mounting Hardware

GLG FARMS

242 3rd Ave W

Sherwood ND 58782

701-263-7397

www.augerjogger.com

